


ULTIMATE UL-4500E

4.5-tonne 4-Post Hoist with 2x 2T Jacking Beams

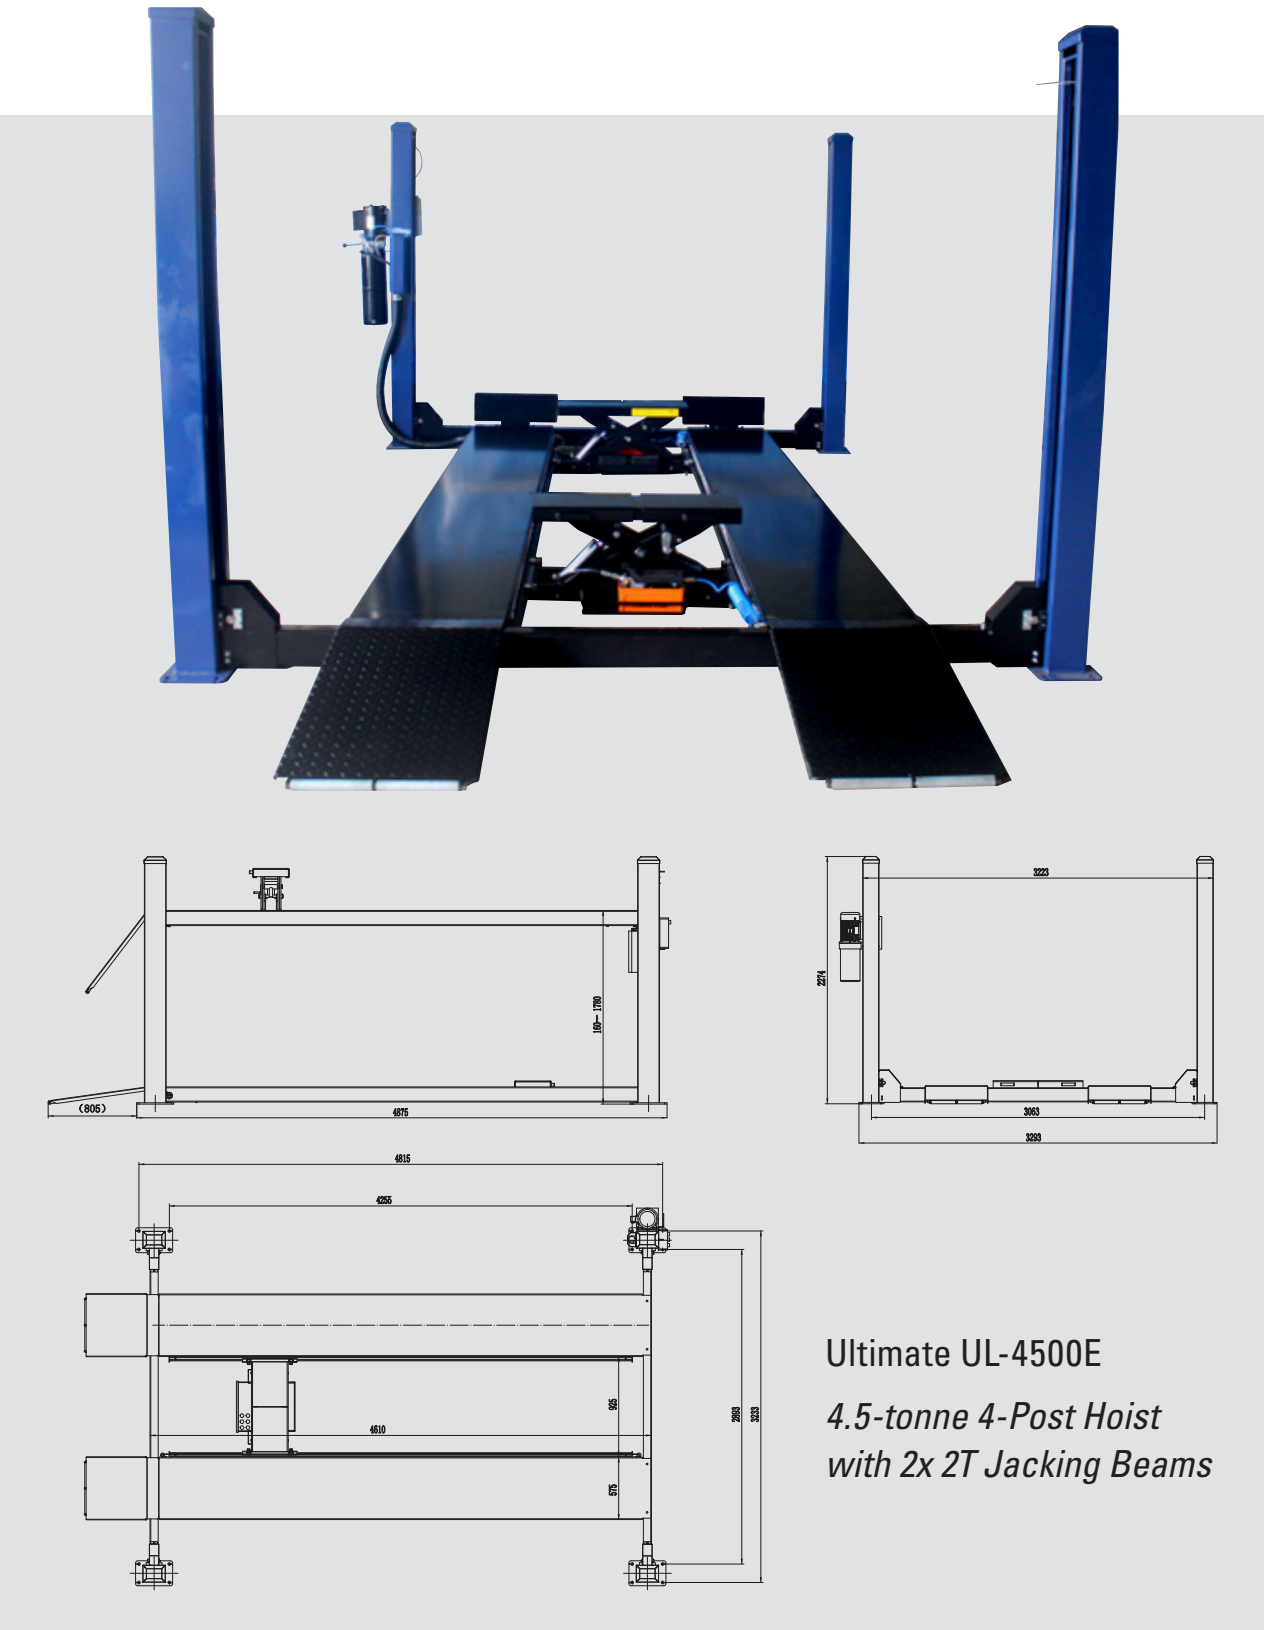

Ultimate UL-4500E
4.5-tonne 4-Post Hoist
with 2x 2T Jacking Beams

Specifications



- Height Overall

2274mm
- Width Overall

3643mm (with power unit)
- Platform Length

4610mm
- Length Overall (incl ramps)

5650mm
- Lifting Height

160–1780mm
- Lifting Capacity

4500kg
- Power

240V/50Hz/1Ph (15 Amp) or
415V/50Hz/3Ph (20 Amp)
- Air Supply

60–90 PSI
- Net Weight

1224kg
- Gross Weight

1240kg



EU Test Standard




DYNAMIC TEST



Steel Core Wire
Rope



Japanese/Italian
Oil Seals



Solid Steel
X Construction



Aluminium Alloy Shell
& Copper Core Motor

The Ultimate UL-4500E is the result of over 40 years of experience supplying and servicing hoists across Western Australia, designed and refined from the ground up to meet the demands of busy Australian workshops.

Built for reliability and safety, the UL-4500E combines a 4.5-tonne lifting capacity with extra-long 4.6m platforms, accommodating everything from small passenger cars to larger utilities and SUVs.

Engineered to endure, it features steel-core wire ropes, solid steel X-construction, and

Japanese/Italian oil seals for long-term performance and minimal maintenance.

Tested to 150% static and 115% dynamic EU standards, and equipped with twin 2-tonne jacking beams for wheels-free operation, the UL-4500E is a dependable all-rounder. Optional alignment kits and

single or three-phase power configurations allow you to tailor it perfectly to your workshop setup.

WorkSafe design-registered and compliant with Australian Standards, the UL-4500E delivers the reliability and peace of mind that only decades of industry experience can produce.



P & M AUTOMOTIVE EQUIPMENT
SALES & SERVICE

Unit 5/75 Kelvin Road, Maddington WA 6109
Phone: +61 8 9209 1044
Email: sales@pmautoeq.com.au